

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number
WO 01/00948 A1

(51) International Patent Classification⁷: **E04F 15/10**,
A2/18, E63B 3/48, 5/06

(21) International Application Number: PCT/SE00/01302

(22) International Filing Date: 19 June 2000 (19.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9914848.8 24 June 1999 (24.06.1999) GB
9923690.3 8 October 1999 (08.10.1999) GB

(71) Applicant and

(72) Inventor: **WHITAKER, Derek** [GB/SE]; TMS Sweden
AB, Box 92135, S-120 08 Stockholm (SE).

(74) Agent: **EHRNER & DELMAR PATENTBYRÅ AB**;
Box 103 16, S-100 55 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SHAPE CONFORMING SURFACE COVERING**

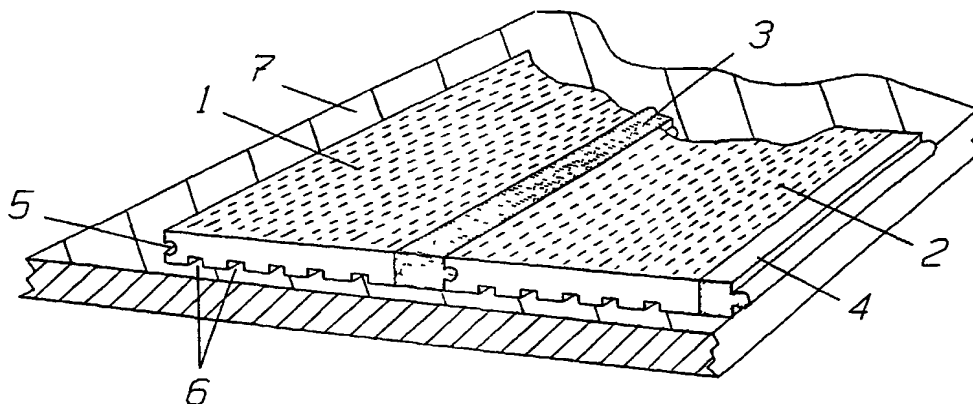

(57) Abstract: A shape conforming surface covering useful for covering any type of surfaces, and comprising planks (1, 2) or sheet of a plastic or flexible material adapted to be interconnected aside of each other thereby forming an assembled surface covering of optional length and width, and which planks (1, 2) or sheet are of a material that can be brought to curved formations, and which at the upper surface of the covering is roughened, for instance sanded or filed so as to imitate any unique grain effect of wooden material. Preferably the planks (1, 2) or sheet are formed with connection means (4, 5) at the longitudinal edges thereof. The surface covering may be an assembled unit comprising planks (1, 2) and caulking elements (3) between each pair of planks.

WO 01/00948 A1

SHAPE CONFORMING SURFACE COVERING

The present invention relates to a shape conforming surface covering useful for covering a floor surface, a wall surface, a boat or yacht deck, floor boards in boats and yachts, bath and shower room floors and walls

5 coverings, swimming pool surroundings, curved floor plans inside and outside buildings, claddings and coverings of many other types of surface recipients, including decoration. The surface covering according to the invention is formed by strips of an flexible material and is adapted for being laid in slightly curved formation where necessary, and it is generally intended to imitate a
10 type of deck made by teak, mahogany, oregon pine etc. and which is sometimes formed with narrow seams by a rubber type material, which is normally of a contrasting colour, often black.

There are in use many surface coverings, many of which are made of straight planks with a version of the present invention easily being usable.

15 Some applications, however, require conformity to curved shapes of the covering base. A typical example is teak planked deck of a yacht. Such surfaces have to be of a good, non slip character, and have to be at least fairly unaffected by water and have to look attractive. Wood, such as teak has been used for many years, but such wooden material is in many ways
20 impractical and of relatively short lifespan. Curved wooden surfaces necessitate considerable stressing, preparation like adapting of the wooden ribs to any curved surface, fixing by screws, use of sealing compound and regular maintenance, especially scrubbing, oiling and varnishing and the use of pollutant, cleaning chemicals on a regular basis and in large amounts on
25 boat, in particular these chemicals drain into the surrounding water. Curved wooden ribs or planks also involve an inherent spring stress requiring a strong fixation, generally using screws or bolts. Further, the new look of a teak deck is lost within weeks, and the whole deck requires major work or replacement in four to six years on average.

30 Ecologically this invention does not require the cutting down of trees

and is recyclable. The invention can take the place of tropical hardwoods used throughout the world in many applications.

The present invention is adapted to suggest a shape conforming surface covering comprising lengths of ribs of mostly the same cross section, but with differing cross sections included within the surface or at its edges or ends as required, of specifically shaped plastic material, which plastic ribs are of such flexibility that then can be made follow at least slightly curved surfaces, tight curves being attainable with the use of heat. The lengths of ribs are adapted to be connected edge to edge in various combinations to form collectively the required size and shape of the surface to be covered. A variation of the invention can be produced with the same material and finish in other cross sections to used for the edges of steps for example, or other functional or decorative applications. Normally a jointing compound must be used on wooden decks, but according to the invention the individual planks and/or caulking strips are malleable, becoming more and more malleable at increasing temperatures. According to the present invention the need for these "later applied" compound along the joints is no longer necessary. The new shapes or curves taken up by the planks or caulking strips become a relatively stress free feature of these planks or caulking strips unless re-adjustment is necessary, whereby re-adjustment can be made by applying heat to the strips, for instance using a hot air gun, hot water, radiant heat etc.

The planks and strips preferably are formed by extrusion of a plastic material and with matching locking means along the longitudinal edges thereof, preferably groove and tenon means. The planks likewise can be formed with narrow strips of a different colour imitating seams of the type used in applying wooden deck on a yacht. The colours of the described planks and strips can easily be changed in the manufacturing extrusion process.

The surface covering as assembled, complete or in sections, is fixed to

the recipient surface by means of an adhesive, and to this end the planks and strips preferably are formed with a suitable bottom surface facilitating the fixing of the covering. There is no need for using screws or bolts and associated holes because captive springing is not a problem as is normally the case with wooden planking made to conform with a curvature.

The surface covering according to the invention can be subjected various mechanical and manual abrasive techniques for specifically forming the surface of the plastic material such as sanding under specific conditions to provide a surface effect which is extremely similar to that of grained wood both in texture and appearance.

The surface covering according to the invention is advantageous in several respects over ordinary wooden coverings of similar types:

it is completely waterproof; it is easily washable to look new every time, even jet washable what is not possible for ordinary wooden coverings since jet washing is damaging the wood grain; it is extremely non slip, it is extremely stain resistant; it is easy to assemble; it can easily be laid in curvature; it can easily be shaped using heat; there is no need for using nails, screws or bolts for fixing same to the recipient; it is throughout a solid or an integral material which can be sanded repeatedly upon need.

Now the invention is to be described in detail by way of examples and with reference to the accompanying drawings, in which:

Figure 1 is a fragmentary perspective view of two plank sections with an intermediate caulking strip; figure 2 shows a similar assembled surface with caulking strips in place between the planks; figure 3 is a section showing a planking assuming a curved shape, and figure 4 shows an assembled surface in a curved format; figure 5a, b, c, d, e, f, g, h, i, and j show cross section examples of methods that can be used to incorporating caulking strips into the surface, figure 5k (1, 2, 3, 4) shows examples of profiles to complete requirement for edgings, cutting out of shapes etc. to comprises a 'system' or compendium of shapes and profiles; figure 6

illustrates various examples of under-surface cross sections; figure 7 illustrates a belt sanding operation; figure 8 illustrates an alternative texturing technique; figure 9 shows an alternative abrasive tool 14a that can be used to produce the wood grain effect surface; figure 10 illustrates an assembled curved section of a surface in plan view; figure 11 illustrates a way of laying the surface.

Figure 1 shows a surface covering comprising planks 1 and 2 with an intermediate caulking strip 3 between each pair of planks. In the illustrated case the planks 1, 2 are formed with male connection means 4 along one longitudinal edge and female connection means 5 along the opposite longitudinal edge. The caulking strips are formed with equivalent male and female connection means arranged so that a set of planks 1, 2 and intermediate caulking strips 3 provide an integral unit. Adhesive being used in the joint if necessary. Any number of planks 1, 2 can be connected to each other, both with and without intermediate caulking strips 3. The underside of the plank can be formed with a number of recesses 6, which both facilitate a curving of the plank, as illustrated in figure 3, and form a connection means for glue or a similar material by means of which the surface covering is glue connected to surface covering recipient 7, as illustrated 11.

In a version of the invention a sheet would be extruded without the caulking strips with the caulking strips co-extruded integral, or with facility to incorporate applied caulking strips.

Both the planks and the caulking strips can be made with different colours, imitating wood like teak, mahogany, pine, oregon pine, redwood, etc. The caulking strips preferably are made of another colour than the planks, for instance a black colour imitating the rubber material seams in seamed decks of yachts. It also retains its colour far better than its' natural wood alternative.

Figure 6 illustrates different types of useful under side surface profiles. The cross sections of the various profiles can also include provision for

insertion of rigid or injected foam of lighter material to reduce the overall weight, and/or for insulating purposes. The planks 1 and 2 and the caulking strips 3, including the male and female connection means 4, 5 and under surface recesses 6 can be formed in endless lengths by any known process, like injection press extrusion or press moulding. The planks 1 and 2 preferably are formed by a plastic material which is stiff enough for keeping the planks and caulking strips together as an integral unit, but which can still be formed in a curvature adapted to the curvature of the recipient 7. Planks can be joined in the longitudinal direction as shown with planks 8 and 9 and a cross extending caulking strip 10 in figure 2. The planks can be formed in a curvature preferably using heat from a hot air gun or a hair dryer 11, as indicated in figure 3. Figure 4 fragmentarily shows a curved surface covering consisting of three planks and intermediate caulking strips.

The planks and the caulking strips can be arranged for interconnection in several ways. In figures 5a and 5e is shown that the planks and the caulking strips have straight side edges and are adapted to be connected by glue or by a welding process; figure 5b, c, e and f illustrate interconnection of the planks and the caulking strips by means of male and female connection means, and figure 5d illustrates an interconnection using overlapping portions of the planks and the caulking strips. Figure 5f illustrates that the planks 12 can be co-extruded with a caulking strip 13, whereby, in the illustrated case, the caulking strip 13 is formed with male connection means 4 and the plank 12 is formed with female connection means 5. Figure 5g shows a co-extruded plank and caulking strip with the male connection means in the caulking strip; figure 5h shows an equivalent co-extrusion in which the caulking strip is formed with female connection means. Figure 5i shows an example of how the upper surface joining profile enables a locking process to take place where the edges are prevented from lifting when the product is assembled, with or without the caulking part of the co-extrusion being under compression upon joining. The male and female connection means are

provided in the plank parts, and a caulking strip is applied as a narrow strip on top of a part of the male connection means. Figure 5j shows an embodiment where a section of the plank or of the profiles used in particular applications is filled with foam of a light weight material. Other examples of profiles with or without foam filling to requirements for edgings, cutting out of shapes etc. to comprises a system or compendium or shapes and profiles are shown in figure 5k (1, 2, 3, 4).

In any of the examples the caulking strip could be a softer material than that of the plank to come under compression, captive or otherwise when the product is assembled

Figure 6 shows a cross section of an extruded plank, in which there are shown, for illustrative purposes, several types of bottom surface recesses

For giving the planks, and the caulking strips a configuration similar to that of wood, the planks are, according to the invention, sanded, for instance using a belt sander 14 a shown in figure 7. The belt sander is brought to attack the plank, specifically using the curved or roller part of the sanding belt, in an angle of for instance 45° and is moved along the plank in direction shown with the arrow. A rotary wire brush can also be used in specific conditions to produce a desired effect, in required. At the same time as giving the planks a wooden like surface structure said sanding makes the upper surface of the surface covering an extremely non slip structure. The sanding operation can be repeated a great many times, even in the laid surface covering.

Figure 8 shows an alternative type of sanding the planks, whereby the belt sander acts at an angle of about 60° to the longitudinal direction of the planks. Said angular strokes across the surface will produce individual effects using a powerfile 15.

Figure 9 shows diagrammatically how an abrasive rotary tool can be used to produce the wool grain effect on the upper surface of the plank. By changing certain certain conditions various effects can be obtained like the

meeting angle 16 in figure 7, the speed of rotaion in figure 9, the coarsness of grit, the direction of stroke 17, which conditions are of importance to react with the formulation of the plastic surface to produce the unique grain effect.

Figure 10 shows an example of use of a piece of surface covering or a curved border type plank mounted in contact with another cross extending border plank, like a plank sheer of a yacht.

The assembled surface covering material 18 is glued at the bottom side thereof and laid as shown in figure 11 by rolling the back of the covering material onto the recepient surface 19. Cutting and trimming of the surface covering is readily achieved, for instance with the use of a sharp knife.

REFERENCE NUMERALS

	1	plank
	2	plank
	3	caulking strip
5	4	male connection means
	5	female connection means
	6	recess
	7	recipient
	8	plank
10	9	plank
	10	cross caulking strip
	11	hot air gun, hair dryer
	12	plank
	13	caulking strip
15	14	belt sander
	14a	abrasive tool
	15	powerfile
	16	angle
	17	direction of stroke
20	18	covering material
	19	recipient surface

CLAIMS

1. A shape conforming surface covering useful for covering any type of
5 surfaces, **characterized** in that the surface covering comprises planks (1, 2) or
sheet of a flexible material adapted to be interconnected aside of each other
thereby forming an assembled surface covering of optional length and width,
and which planks (1, 2) are of a material that can be laid in curved
10 formations, and which at the upper surface of the covering is roughened, for
instance sanded or filed so as to imitate any unique grain effect of wooden
material.

2. A surface covering according to claim 1, **characterized** in that the
roughening of the upper surface of the plank (1, 2) is made by sanding,
especially using the curved or roller part of a sanding belt, or a rotary wire
15 brush, thereby imitating the grain effect of a wooden material.

3. A surface covering according to claim 1 or 2, **characterized** in that
the upper surface of the planks (1, 2) or sheet is sanded in the longitudinal
direction of the surface covering material such as to roughen the surface to
become non slippery and to imitate the appearance of a wooden material.

20 4. A surface covering according to claim 1 or 2, **characterized** in that
the sanding is made as discrete sanding portions extending at an oblique
angle to the longitudinal direction of the plank (1, 2) or the sheet.

5. A surface covering according to any of claims 1-4, **characterized** in
that the planks or sheet are made of a plastic or resin material, like PVC,
25 having required additives including UV protection, fire retardance substances,
natural or synthetic fibres.

6. A surface covering according to any of the preceding claims,
characterized in that the planks or sheet are formed with streaks or lines of
colour included in the extrusion to further imitate the grain in wood.

30 7. A surface covering according to claim 1, 2 or 3, **characterized** in
that

the surface covering is formed for use as a floor surface, a wall surface, a boat or yacht deck, floor boards in boats and yachts, bath and shower room floors and walls coverings, swimming pool surroundings, curved floor planks inside and outside buildings, claddings and coverings of many other types of surface recipients.

8. A surface covering according to any of the preceding claims, **characterized** in that the surface covering is made up by plank strips (1, 2) having a colour and lustre imitating the grain effect of a wooden material like teak, mahogany, pine, oregon pine, redwood, etc., which planks are formed with matching male and female means at opposite longitudinal edges for interconnecting same.

9. A surface covering according to any of the preceding claims, **characterized** in that the surface covering comprises several planks (1, 2) and intermediate caulking strips (3), whereby the planks (1, 2) are of a colour and lustre imitating the colour and grain structure of a wooden material, and the caulking strips are of a different colour, preferably a dark colour.

10. A surface covering according to claim 9, **characterized** in that the caulking strips (3) are formed with a male connection part and the mating edge of the adjacent plank or sheet with a female connection part, or vice versa.

11. A surface covering according to any of the preceding claims, **characterized** in that the covering is extruded in sheet form having co-extruded caulking strips.

12. A surface covering according to any of claims 1-9, **characterized** in that the covering is extruded in sheet form having recesses for later inserting of caulking strips in said recesses.

13. A surface covering according to any of claims 1-7, **characterized** in that the covering is a co-extrusion of planks (1, 2) and integral caulking strips (3).

14. A surface covering according to any of claims 1-7, **characterized** in that the planks (1, 2) and the caulking strips are formed with mating

interconnection means, preferably a male connection means (4) along one longitudinal edge and a female connection means (5) along the opposite longitudinal edge.

15. A surface covering according to any of the preceding claims,
5 **characterized** in that the planks (1, 6) or sheet are formed with longitudinal slots (6) at the underside thereof for facilitating forming of curved coverings and for acting as a base for a glue or adhesive material by means of which the surface covering is mounted on a surface recipient (7).

16. A surface covering according to any of the preceding claims,
10 **characterized** in that the planks (1, 2) or sheet are partly filled with a rigid material.

17. A surface covering according to any of claims 1-15, **characterized** in that the planks (1, 2) or sheet are partly filled, from the underside thereof, with a light weight material like a foam material.

1/4

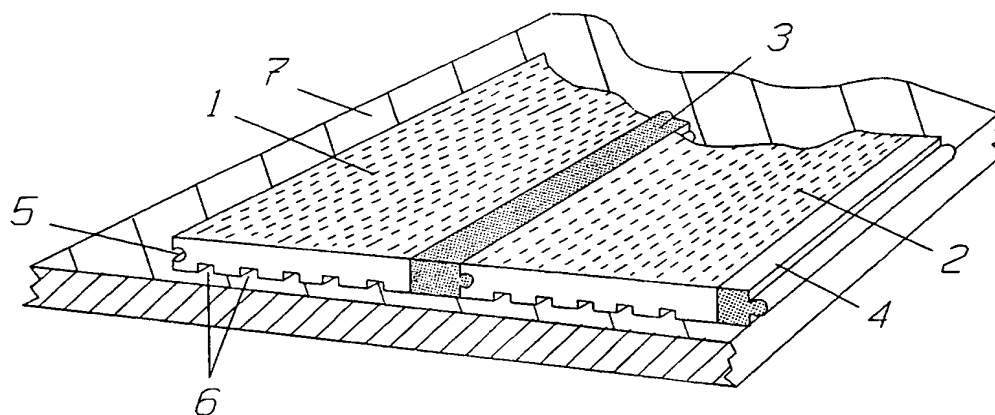


Fig. 1

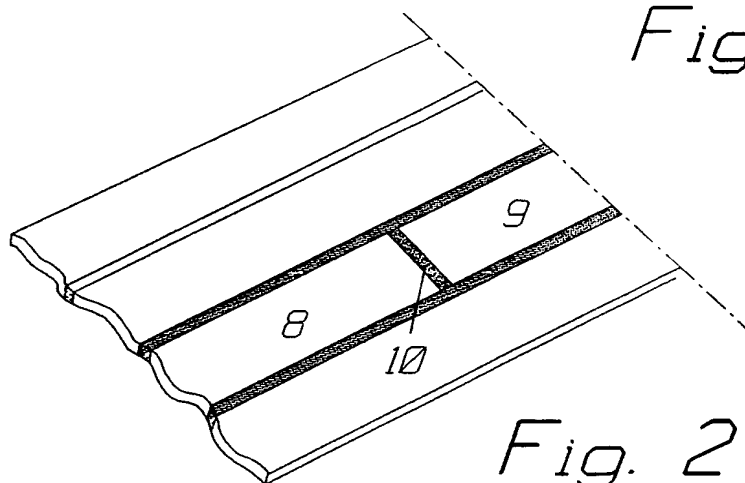


Fig. 2

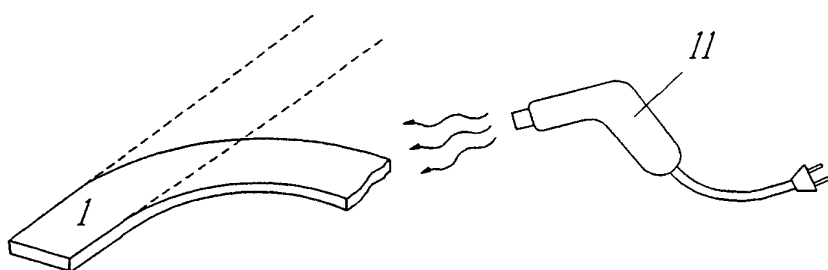


Fig. 3

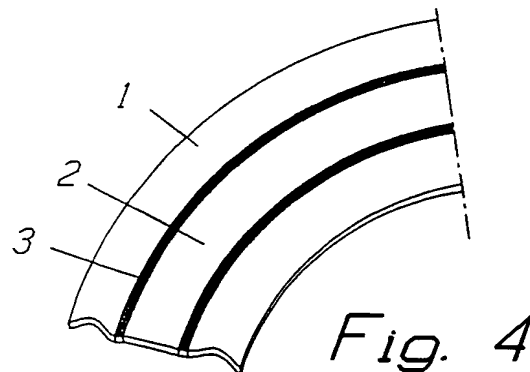


Fig. 4

2/4

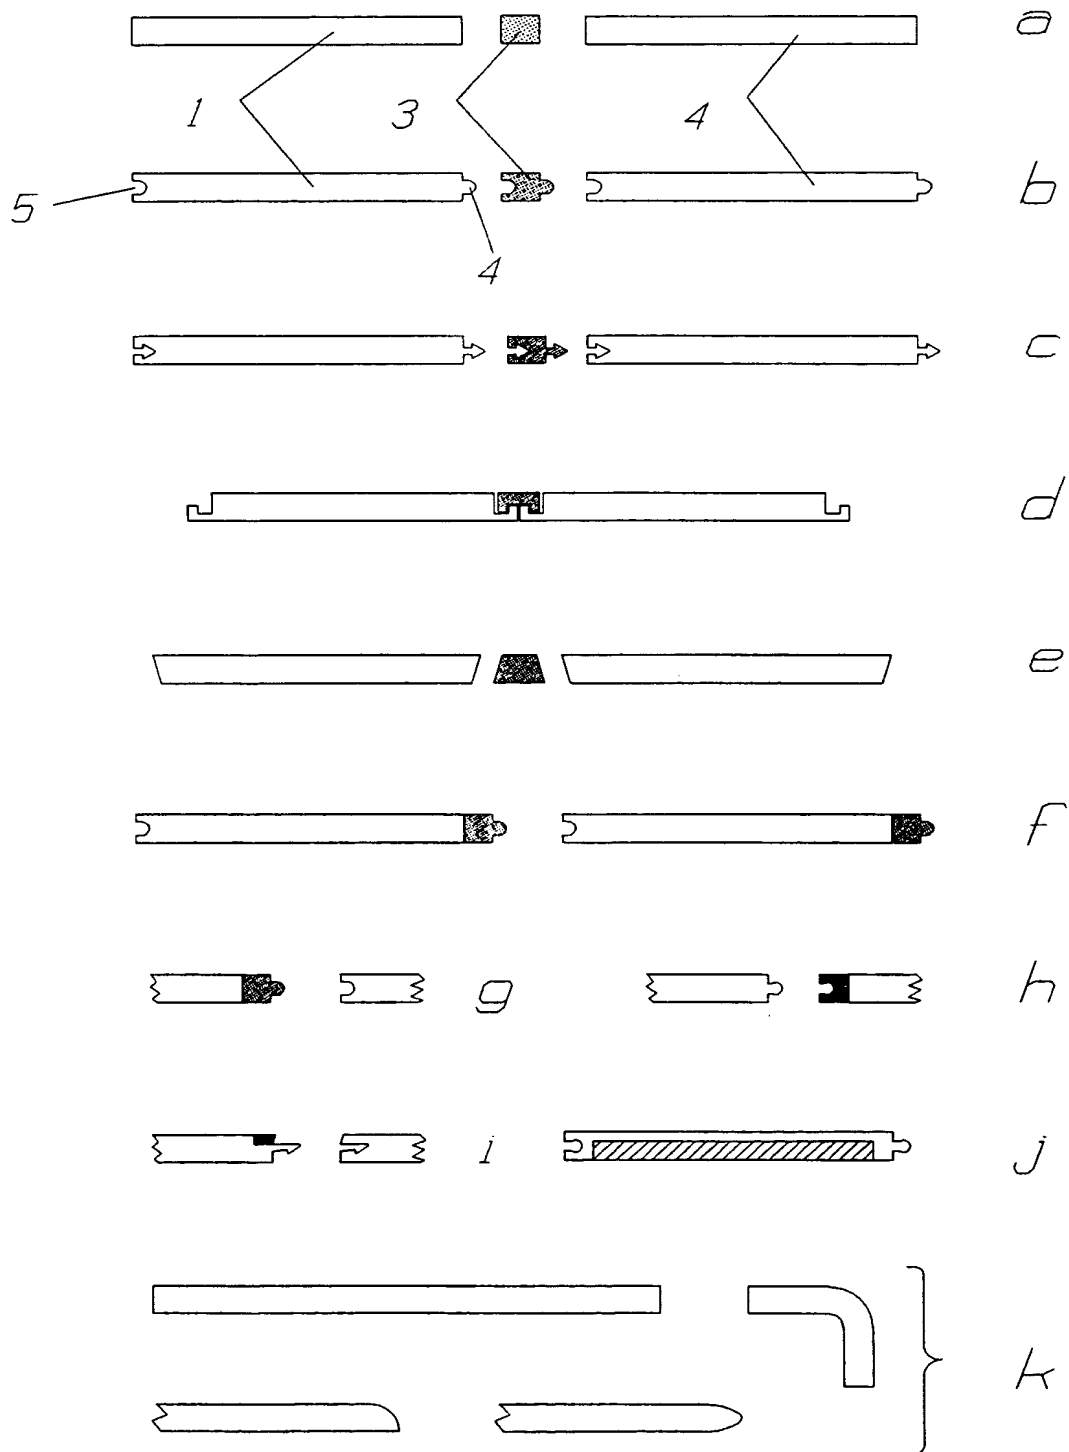


Fig. 5

3/4




Fig. 6

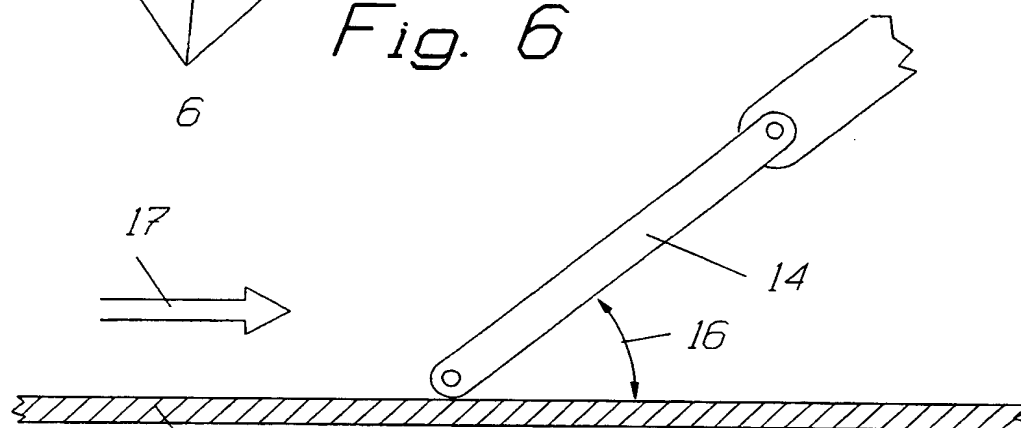


Fig. 7

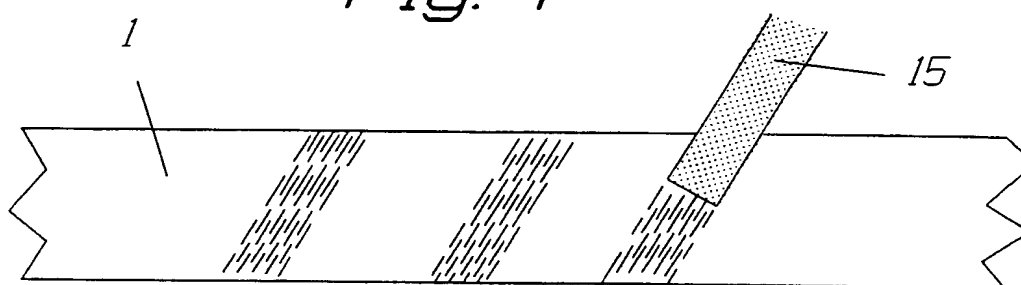


Fig. 8



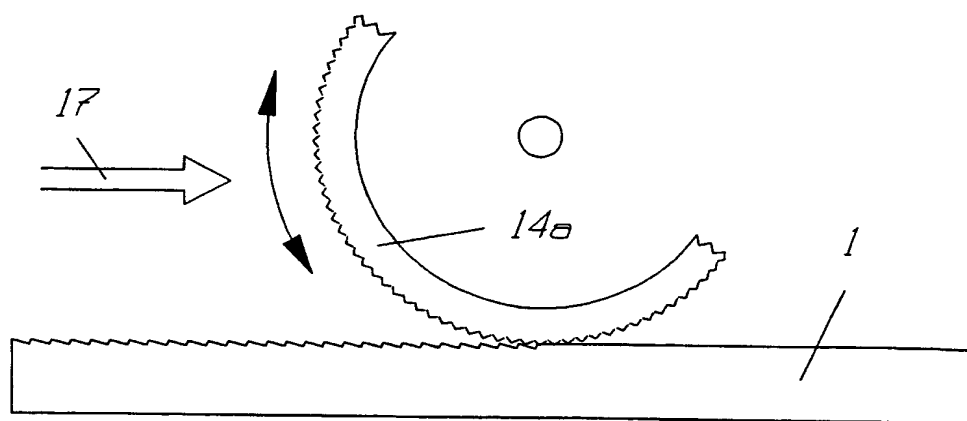


Fig. 9

4/4

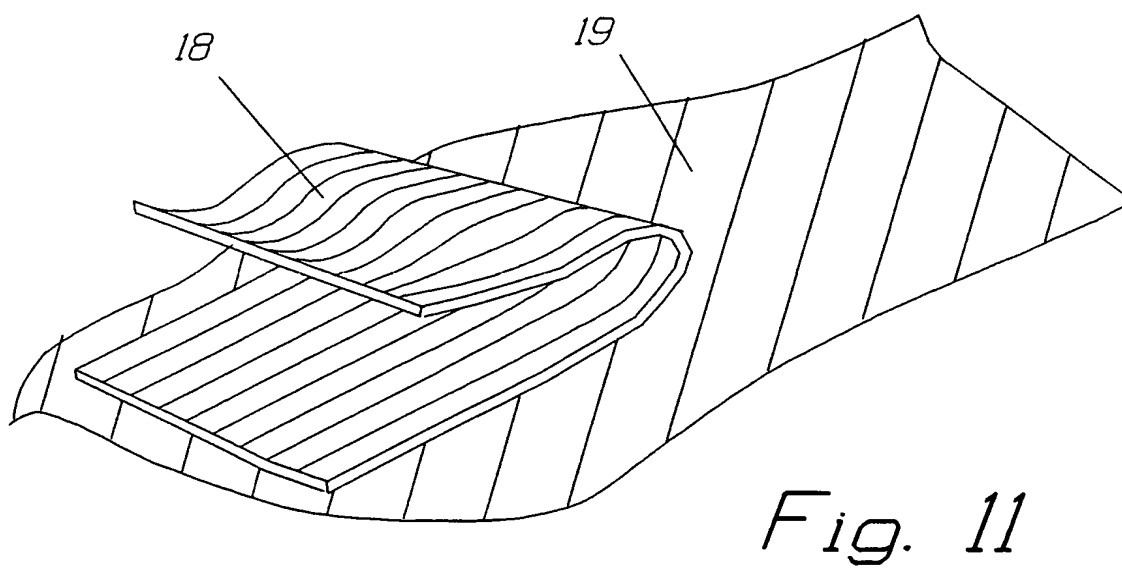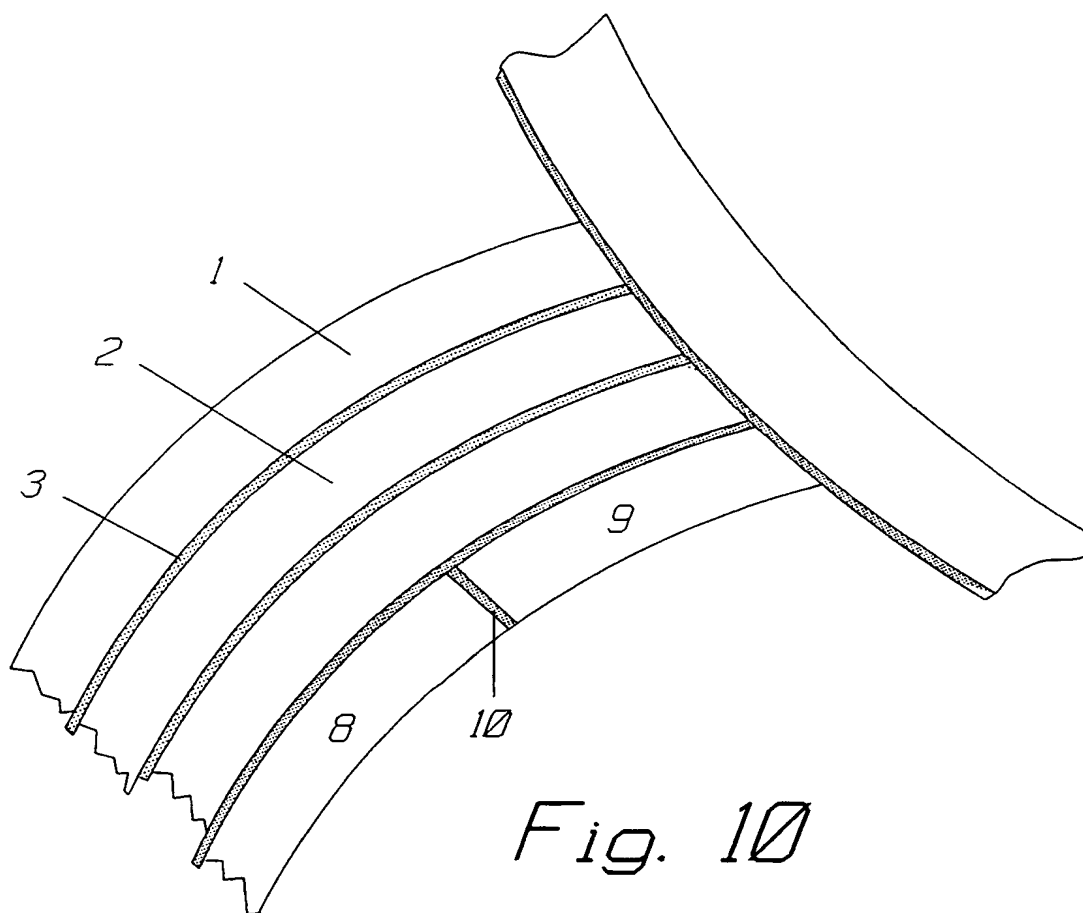

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01302

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E04F 15/10, E04F 12/18, B63B 3/48, B63B 5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E04F, B63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2000471 A (CARL FREUDENBERG KG), 10 January 1979 (10.01.79), page 1, line 91 - line 98, abstract --	1
A	US 5207172 A (L. WOLTER), 4 May 1993 (04.05.93), column 2, line 22 - line 31; column 4, line 6 - line 9, abstract -- -----	1-17

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2000

Date of mailing of the international search report

25 -10- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Örjan Nylund / MRo

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/10/00

International application No.

PCT/SE 00/01302

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
GB	2000471	A	10/01/79	DE	7720464 U	10/11/77
				FR	2396492 A	26/01/79
				IT	1104673 B	28/10/85
				IT	7849574 D	00/00/00
US	5207172	A	04/05/93	AT	106050 T	15/06/94
				DE	4038181 C	09/04/92
				DE	59101721 D	00/00/00
				DK	487877 T	10/10/94
				EP	0487877 A,B	03/06/92
				SE	0487877 T3	
				ES	2056551 T	01/10/94
				JP	4267973 A	24/09/92
				NO	301754 B	08/12/97
				NO	914634 D	00/00/00
				PT	99233 A,B	30/11/93